Lecture 1: September 6, 2001

Welcome to 6.838J, Geometric Computation!

- Introductions
- Overview and Goals
- General Information
- Syllabus
- 2D Convex Hull
- Signup sheets (return by end of class)

Course Overview

- Geometric Computation is Pervasive
  - Robotics, Graphics, CAD/CAM, GIS, Medicine, Networking
  - Geographic resource discovery
    - Classic examples: nearest post office, hospital
    - GIS overlay: efficient geometric co-occurrence
  - Resource simulation and management
    - Art-gallery problem: place minimal set of guards
    - Air-traffic control: when is next collision
  - Computer graphics
    - Scalable visibility tests for rendering
    - Global lighting simulations (ray-tracing, radiosity etc.)
    - Collision detection for realistic physically-based animation
- Computational drug design and discovery
  - Spatial indexing for protein folding
  - Spatial signatures for docking studies
- Robotics
  - Motion planning among obstacles
  - Scalable map construction and localization
- Location-aware computing
  - Location-based services, Mobile dynamic networks, etc.

Course Goals

Solid introduction to fundamental geometric data structures and algorithms
Experience with algorithm design and analysis (and optionally, implementation)
Intuition about what methods might be applicable as you tackle future problems

General Information

Class has no final, or final project
Components of course grade:
- 50% Lecture/presentation (typically, one per student)
  - Developed jointly with one or both professors
  - Start with list of concepts (two weeks beforehand)
  - Review slides, figures, demos (one week beforehand)
  - Expect to devote significant time with us, and off-line
  - Use signup sheet to rank your preference for each topic
- 50% Assignments (part mandatory, part optional)
  - Four assignments, roughly one every three weeks
  - Two weeks to complete each one (see syllabus)
  - Mandatory component: problems with written solutions
  - Optional component:
    - Either: additional written problems
    - Or: a Java programming assignment

Open Problems (Optional)
- Problems stated upon request
- Solving a significant open problem yields an A+ in the class

Syllabus

Low-dimensional computational geometry
- L1: 2D Convex Hulls
- L2: GIS Overlay and Segment Intersection
- L3: Low-Dimensional Linear Programming
- L4: Polygon Triangulation

Organizing Objects and Spaces
- L5: Orthogonal Range Searching
- L6: Point Location / Spatial Indexing
- L7: Voronoi Diagrams
- L8: Robustness and Perturbation Schemes
- L9: Arrangements and Duality
- L10: Delaunay Triangulations, CDTs

Surface Representations and Algorithms
- L11: Representing Polyhedra
- L12: 3D Convex Hulls
- L13: Representing Smooth Surfaces
- L14: Binary Space Partitions

Syllabus (Cont.)

Accounting for Motion
- L15: Kinetic Algorithms
- L16: Robot Motion Planning
- L17: Quadtrees and Non-Uniform Meshing
- L18: Visibility Data Structures

Higher Dimensions
- L19: Medial Axis, Surface Reconstruction
- L20: Higher- and High-Dimensional LP
- L21: Closest-Pair Algorithms
- L22: Approximate Nearest Neighbor
- L23: Iterative Algorithms
- L24: Approximate Nearest Neighbor (Hamming)
- L25: Low-Distortion Embeddings
- L26: Reductions to Approximate Nearest Neighbor

Convexity

A set is convex when every line segment connecting two points in the set is itself contained in the set

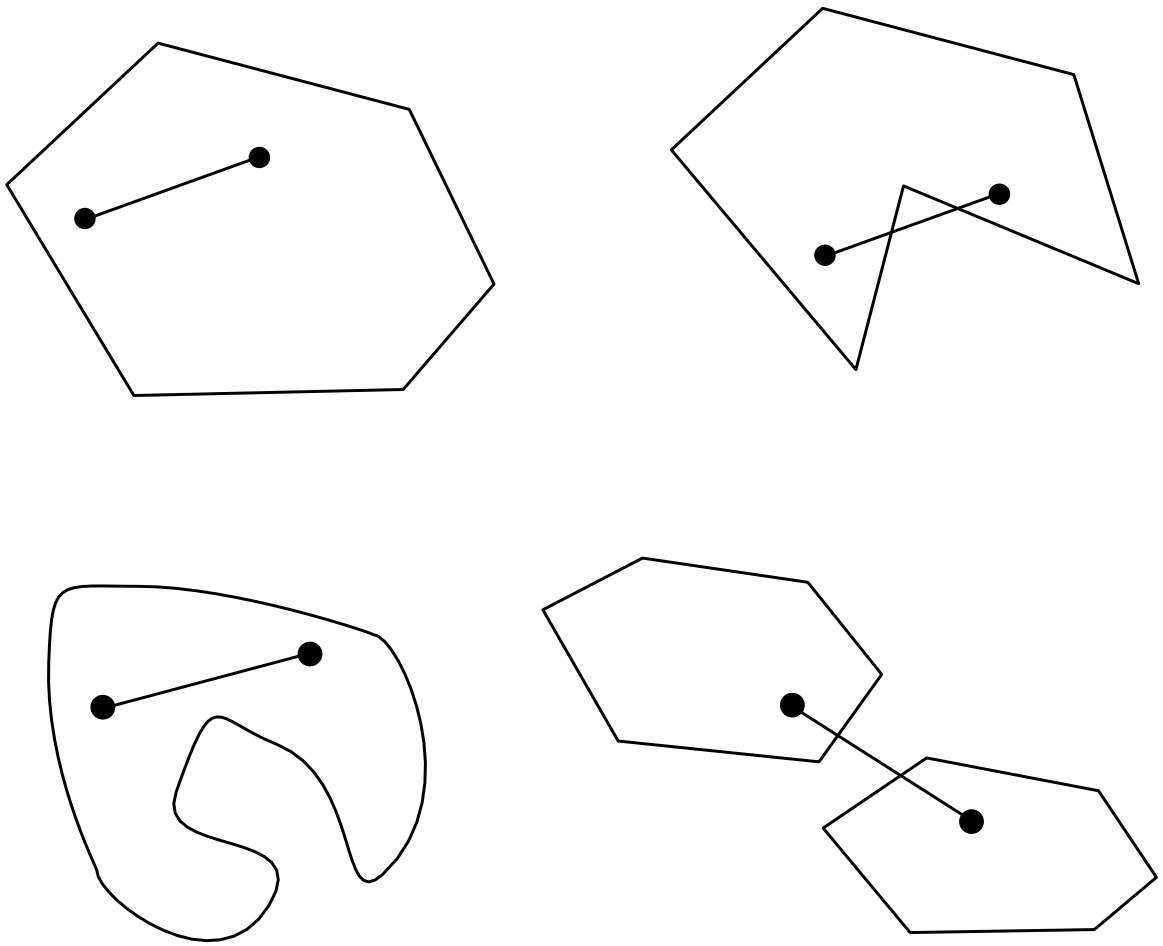

Convex Hull

What is the convex hull of a set of points?
Several equivalent definitions:

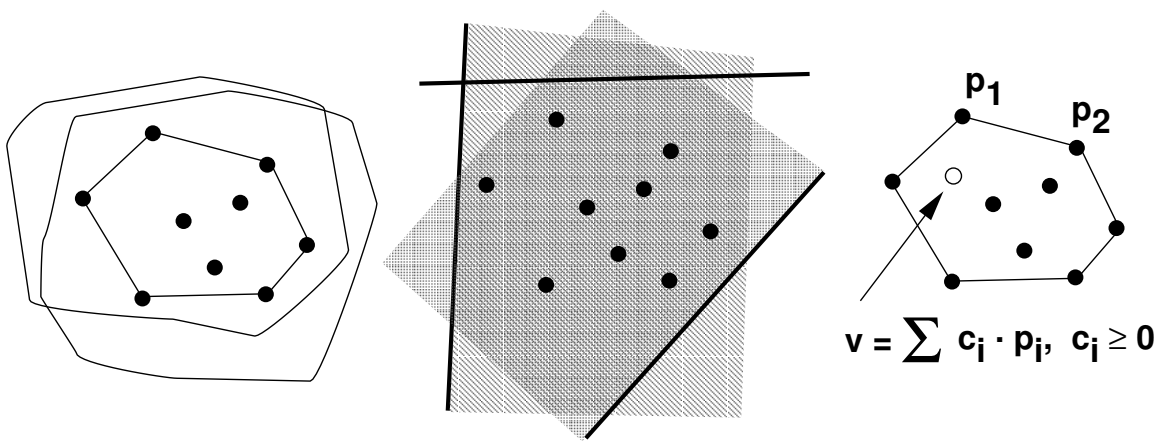

1. The smallest convex set containing the points
2. The *intersection* of all convex sets containing the points
3. The *union* of all points expressible as convex combinations of the $\mathbf{p}_i$:

$$\cup \mathbf{v} = \sum_{i=1}^{n} c_i \mathbf{p}_i; \quad \forall\, i, c_i \geq 0; \text{ and } \sum_{i=1}^{n} c_i = 1.$$

("Convex combination" means coefficients c_i are non-negative and sum to one. Relax non-negativity requirement: get "affine combination".)

None of these are particularly well-suited to algorithm design.

2D Convex Hull

The **2D Convex Hull** problem:

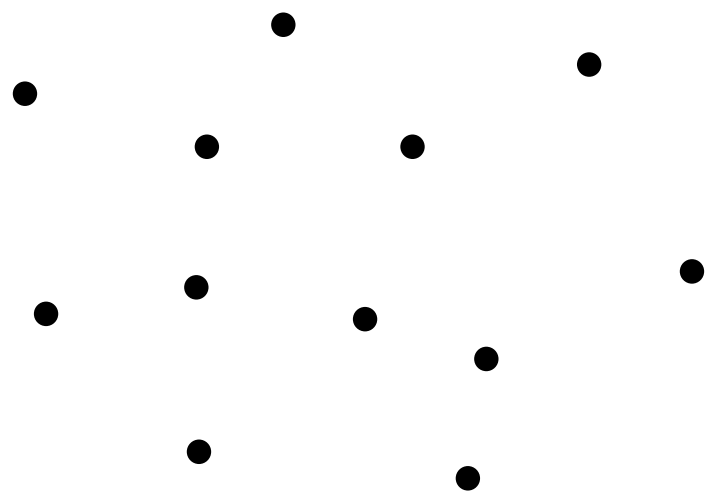

Given a finite set $S \subset \Re^2$ of n points on plane,
determine the convex hull of S, denoted Conv(S).

We'll compute the *boundary* of the convex hull:

In this case, a closed polygonal chain of vertices and edges
(or simply an ordered list of vertices, with edges implied)

For a set S of n points:

What is worst-case complexity of Conv(S)?

... Best-case?

What if all n points are distinct?

2D Convex Hull

Seemingly simple, but illustrates several recurring issues:

- Algorithm design, analysis, correctness
- Progression from brute-force to efficient algorithms
- Underlying geometric predicates
- Robustness / Underlying number representations
- Genericity assumptions / input degeneracies
- Output-sensitive running time

Extremal points

The planar convex hull is a convex polygon.

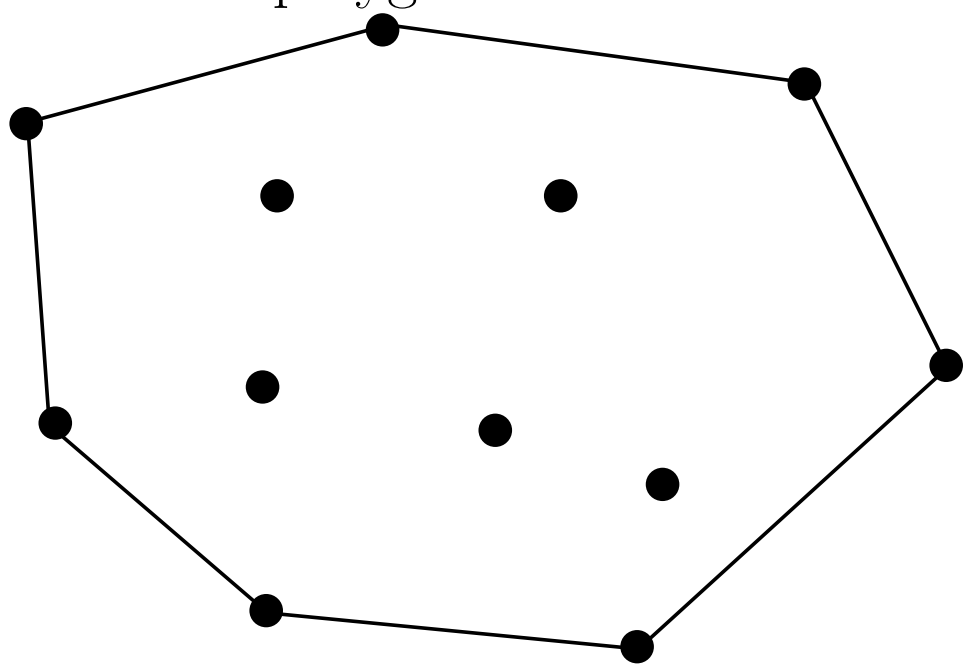

It can therefore be specified completely by a list of its **extremal** (or corner) points.
These corner points are drawn from the set S.
For now, assume S contains n distinct points

Brute-Force Algorithm

Check each point pair: does it form a boundary edge?

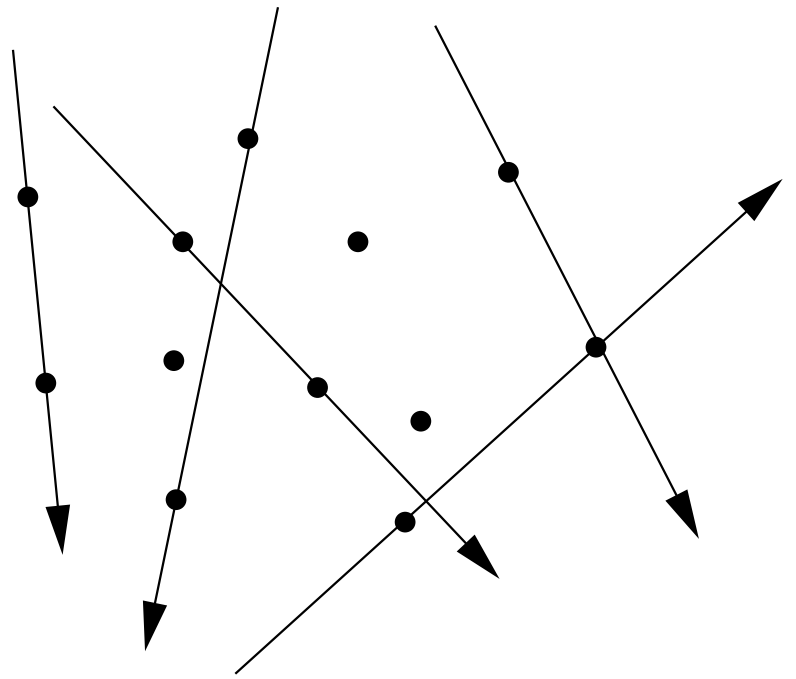

I.e. for all pairs $p, q \in S$, if for *all* $x \in S - \{p, q\}$, x lies to the *left* of the oriented line $\overline{pq}$, emit an edge pq on the boundary of the convex hull.

To determine whether point $r = (r_x, r_y)$ lies to the left of the oriented line p, q (where $p = (p_x, p_y)$ and $q = (q_x, q_y)$), compute the *sign* of the determinant:

$$\begin{vmatrix} 1 & r_x & r_y \\ 1 & p_x & p_y \\ 1 & q_x & q_y \end{vmatrix}$$

Leftof Predicate

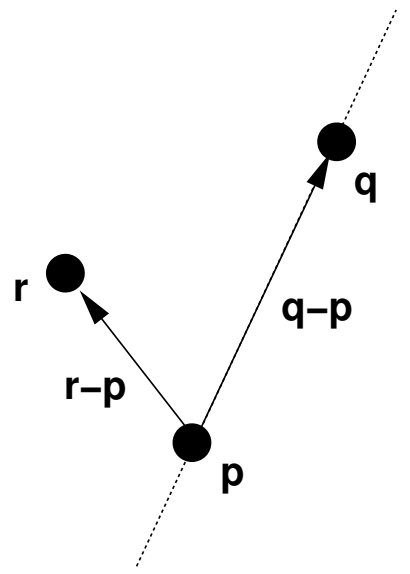

Why? Just z component of $(\mathbf{q} - \mathbf{p}) \times (\mathbf{r} - \mathbf{p})$:

$$\begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ q_x - p_x & q_y - p_y & 0 \\ r_x - p_x & r_y - p_y & 0 \end{vmatrix}$$

Running time of brute-force algorithm?

- Each LeftOf predicate takes $O(1)$ time
- There are $\binom{n}{2}$ candidate point pairs
- Checking one candidate edge against $n - 2$ points takes $O(n)$ time
- Chaining isolated hull edges takes $O(n^2)$ time, naively
- Thus total time is $\binom{n}{2} \cdot n + O(n^2) = O(n^3)$

Degeneracy

As defined, LEFTOF must return either true or false
What if three input points happen to be collinear?

Suppose LEFTOF returns true. What happens?

Suppose LEFTOF returns false. What happens?

Problem: sidedness test alone isn't sufficient.

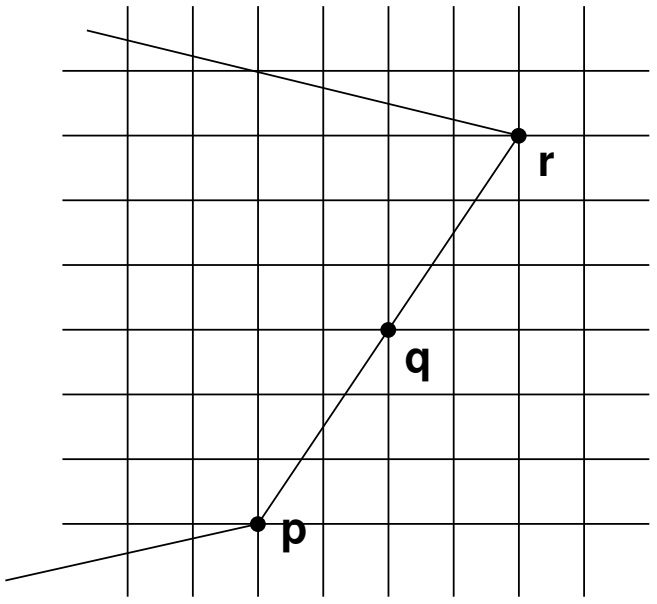

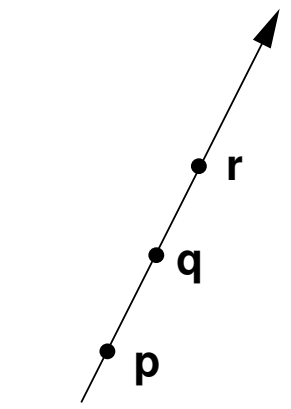

r leftof pq ?

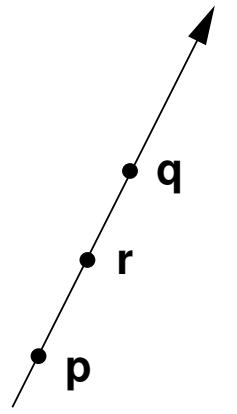

r leftof pq ?

How can this be fixed?

Robustness

Suppose three input points are *nearly* collinear

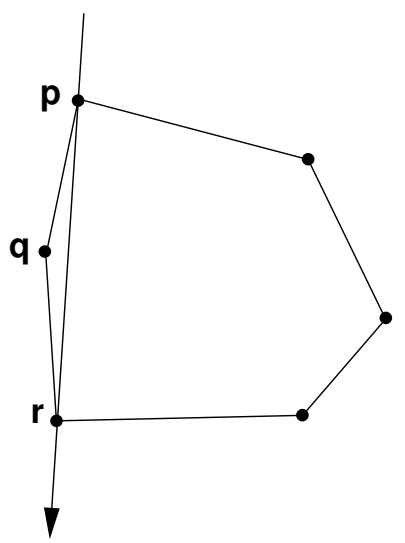

Finite-precision (integer, floating-point) arithmetic can conclude that:

r is LEFTOF **pq**, and

p is LEFTOF **qr**, **and**

q is LEFTOF **pr** !

What happens?

Algorithm is not **robust**.

It can produce non-sensical output.

Robustness Issues

How can this be fixed?

Several options:

- Use arbitrary-precision arithmetic
  - Often overkill
  - Incompatibility with downstream implementations
- Use precision as necessitated by data
  - Composite quantities
  - Custom predicates
  - Overhead in ordinary case

Robustness is a major, recurring issue in design of geometric algorithms.

Andrews' (1979) modification of Graham Scan (1972)

Idea: sort points left to right, then add to hull incrementally

Particularly simple; handles degeneracies; robust.

CONVEXIFY($\mathcal{S}, \mathbf{p}$)

/* $\mathcal{S}$ is a stack of points; TOS is t */

while ($\mathcal{S}$.len ≥ 2) **and** ($\mathbf{p}$ LEFTOF (p_{T-1}, p_T))

POP($\mathcal{S}$)

PUSH($\mathcal{S}$, $\mathbf{p}$)

SWEEP-HULL(Array $\mathbf{p}_i$)

Sort $\mathbf{p}_i$ in place, by x coordinate

STACK UpperHull = { $\mathbf{p}_1$ }

For $i = 2$ to n

CONVEXIFY (UpperHull, $\mathbf{p}_i$)

STACK LowerHull = { $\mathbf{p}_n$ }

For $i = n - 1$ downto 1

CONVEXIFY (LowerHull, $\mathbf{p}_i$)

Remove first, last points of LowerHull

Output UpperHull **concat** LowerHull

Andrews' Algorithm: Example

Intuition: Repeatedly

Compare $\mathbf{p}_k$ to directed line from $\mathbf{p}_{T-1}$ to $\mathbf{p}_T$

If $\mathbf{p}_k$ is leftof this line, pop $\mathbf{p}_T$ off of stack

Otherwise, push $\mathbf{p}_k$ onto stack

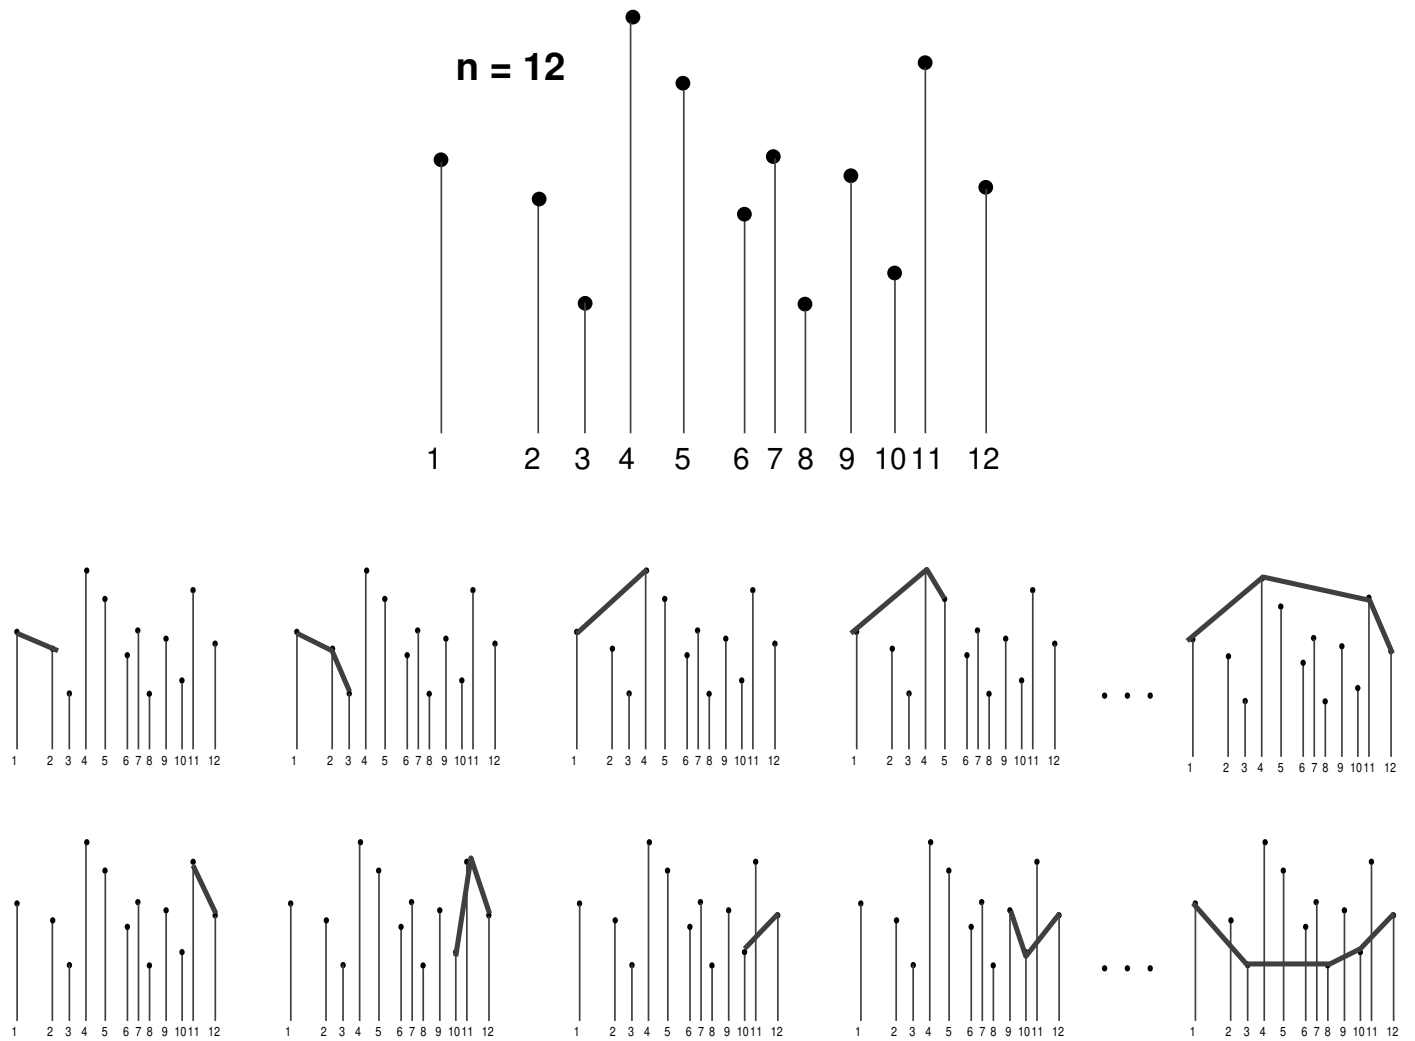

Running time: $O(n \lg n) + 2 \cdot O(n) = O(n \lg n)$

Degeneracy

Are three collinear points a problem?

- Middle point should not occur on output hull
- Make LEFTOF true for this case
- Note how x ordering simplifies things

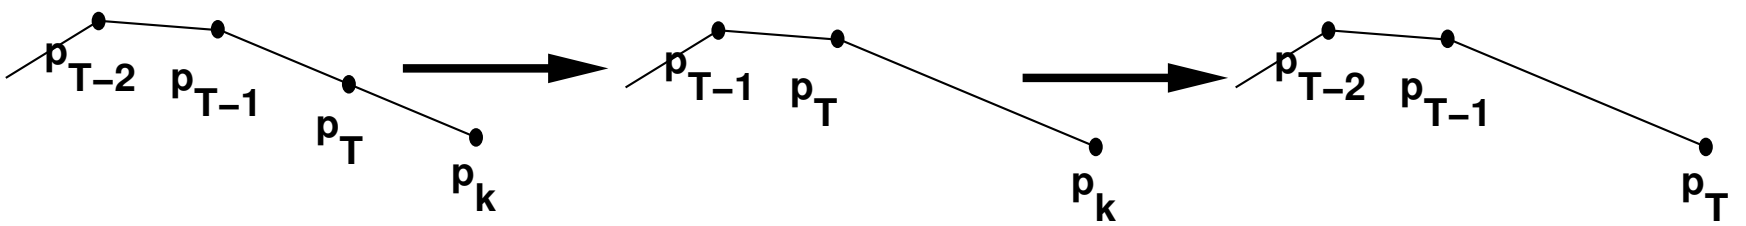

Is this algorithm well-defined?

Degeneracy (cont.)

Algorithm assumed that all x coordinates distinct

What if multiple points with same x coordinate occur?

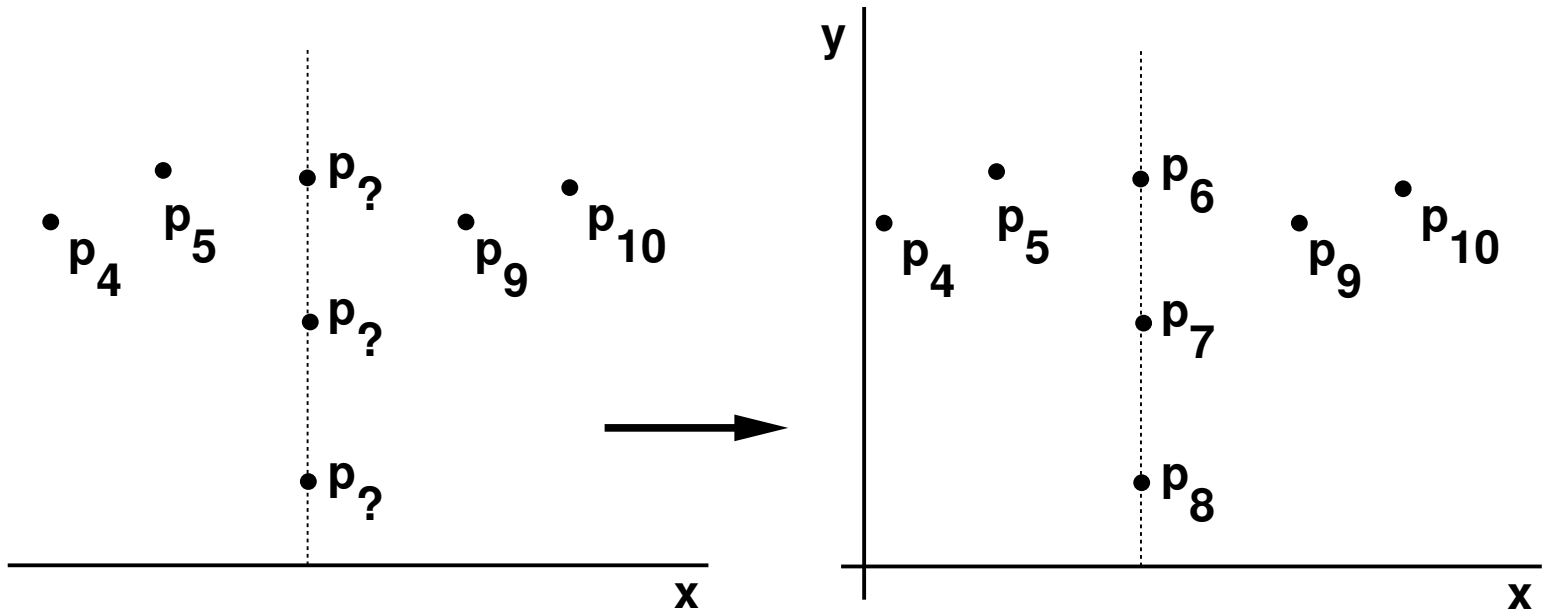

What is solution?

Called "lexicographic sorting"

Robustness, Running Time

Algorithm is guaranteed to produce a closed polygonal chain

Insufficient precision can still cause erroneous output:

- Omission of input point that should occur on hull
- Inclusion of input point lying inside hull ("dent" in hull)

So the algorithm is robust, but not necessarily correct.

Running time:

- Dominated by initial sort, $O(n \lg n)$ time
- POP and PUSH can happen at most $O(n)$ times

Example homework questions

Written questions:

- Give a linear-time algorithm to compute the convex hull of a simple polygon.
  - Make reasonable assumptions, and state them
- How can isolated hull edges be chained together in $O(n)$ time and space?
  - Assume each input vertex occurs on either zero or two hull edges.

Programming questions:

- Implement and animate Andrews' convex hull algorithm
  - Free to use public-domain GUI, graphics code with attribution
- Implement a solution to either of the written questions
  - OK to work with someone who is writing up those solutions