Strategies for Managing Data Complexity

- Separate specification from implementation
- Procedural interface to data (enables alternative reps)
- Manifest Typing (enables multiple reps)
- Generic operations
  - Dispatch on type
  - Table-driven interface (**Data-Directed Programming**)
- **Packages**
- **Closure**
- **Coercion**
- Message Passing

Rectangular Package

```
;; Rectangular complex implementation...
(define (install-rectangular-package)
  ;; Internal rep: RepRect = Sch-Num X Sch-Num
  ;; internal procedures on RepRect...
  (define (real-part z) (car z))
  (define (imag-part z) (cdr z))
  (define (make-from-real-imag x y) (cons x y))
  (define (magnitude z)
    (sqrt (+ (square (real-part z))
             (square (imag-part z)))))
  (define (angle z)
    (atan (imag-part z) (real-part z)))
  (define (make-from-mag-ang r a)
    (cons (* r (cos a)) (* r (sin a))))

  ;; interface to the rest of the system
  ;; External rep: Rectangular = 'rectangular X RepRect
  (define (tag x) (attach-tag 'rectangular x))




  ; Constructors: Sch-Num, Sch-Num -> Rectangular
  (put 'make-from-real-imag 'rectangular
    (lambda (x y) (tag (make-from-real-imag x y))))
  (put 'make-from-mag-ang 'rectangular
    (lambda (r a) (tag (make-from-mag-ang r a))))
  'done)
```

```
; Accessors
(put 'real-part '(rectangular) real-part)
(put 'imag-part '(rectangular) imag-part)
(put 'magnitude '(rectangular) magnitude)
(put 'angle     '(rectangular) angle)
```

Constructor Interface Example

```
;; Generic constructors
(define (make-from-real-imag x y)
  ((get 'make-from-real-imag 'rectangular) x y))
```

Try this out for $3 + 4i$

```
;; Trace through substitution model...
(define my-z
  (make-from-real-imag 3 4))

(define my-z
  ((get 'make-from-real-imag 'rectangular) 3 4))

(define my-z
  ([lambda (x y) (tag (make-from-real-imag x y))] 3 4))

(define my-z
  (tag (make-from-real-imag 3 4)))

(define my-z (attach 'rectangular (cons 3 4)))
```

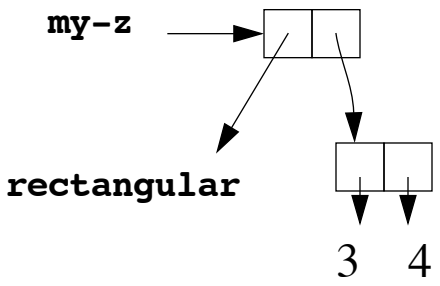

Generic Operation (Data-Directed) Example

```
(define (real-part z) (apply-generic 'real-part z))
(define (magnitude z) (apply-generic 'magnitude z))
...

(define (apply-generic op . args)
  (let ((type-tags (map type-tag args)))
    (let ((proc (get op type-tags)))
      (if proc
          (apply proc (map contents args))
          (error "No method for types - APPLY-GENERIC"
                 (list op type-tags))))))
```

An example generic accessor:

```
;; Trace through substitution model
(real-part my-z)

(apply-generic 'real-part my-z)

op -> 'real-part
args -> (my-z)
type-tags -> (rectangular)  ;; why we installed
                            ;; as (rectangular) type!
proc -> [real-part proc from rectangular package]
==> 3
```

Complex Arithmetic (old)

```
;; Complex = Rectangular U Polar
;; add-complex: Complex, Complex -> Complex
(define (add-complex z1 z2)
  (make-from-real-imag
    (+ (real-part z1) (real-part z2))
    (+ (imag-part z1) (imag-part z2))))

;; sub-complex: Complex, Complex -> Complex
(define (sub-complex z1 z2)
  (make-from-real-imag
    (- (real-part z1) (real-part z2))
    (- (imag-part z1) (imag-part z2))))

;; mul-complex: Complex, Complex -> Complex
(define (mul-complex z1 z2)
  (make-from-mag-ang
    (* (magnitude z1) (magnitude z2))
    (+ (angle z1) (angle z2))))

;; div-complex: Complex, Complex -> Complex
(define (div-complex z1 z2)
  (make-from-mag-ang
    (/ (magnitude z1) (magnitude z2))
    (- (angle z1) (angle z2))))
```

Complex Package - generic arithmetic

```
;;; the complex number package
(define (install-complex-package)
  ;; Internal Rep: RepComplex = Rectangular U Polar

  ;; import from rectangular and polar packages
  (define (make-from-real-imag x y)
    ((get 'make-from-real-imag 'rectangular) x y))
  (define (make-from-mag ang r a)
    ((get 'make-from-mag-ang 'polar) r a))

  ;; internal definitions...
  (define (add-complex z1 z2)
    (make-from-real-imag
      (+ (real-part z1) (real-part z2))
      (+ (imag-part z1) (imag-part z2))))
  (define (sub-complex z1 z2)
    (make-from-real-imag
      (- (real-part z1) (real-part z2))
      (- (imag-part z1) (imag-part z2))))
  (define (mul-complex z1 z2)
    (make-from-mag-ang
      (* (magnitude z1) (magnitude z2))
      (+ (angle z1) (angle z2))))
  (define (div-complex z1 z2)
    (make-from-mag-ang
      (/ (magnitude z1) (magnitude z2))
      (- (angle z1) (angle z2))))
```

Complex Package, cont'd

```
;;; interface to rest of system -- export to table
;;; External Rep: Complex = 'complex X RepComplex
(define (tag z) (attach-tag 'complex z))

(put 'add '(complex complex)
  (lambda (z1 z2) (tag (add-complex z1 z2))))
(put 'sub '(complex complex)
  (lambda (z1 z2) (tag (sub-complex z1 z2))))
(put 'mul '(complex complex)
  (lambda (z1 z2) (tag (mul-complex z1 z2))))
(put 'div '(complex complex)
  (lambda (z1 z2) (tag (div-complex z1 z2))))
; Constructors
(put 'make-from-real-imag 'complex
  (lambda (x y) (tag (make-from-real-imag x y))))
(put 'make-from-mag-ang 'complex
  (lambda (r a) (tag (make-from-mag-ang r a))))
'done)
```

Generic Arithmetic

```
(define (add x y) (apply-generic 'add x y))
(define (sub x y) (apply-generic 'sub x y))
(define (mul x y) (apply-generic 'mul x y))
(define (div x y) (apply-generic 'div x y))
```

Ordinary Number Package

```
;;; the ordinary number package
(define (install-number-package)
  ;; Internal rep: RepNum = Sch-Num
  ;; internal procedures -- just use Scheme!

  ;; External rep: Number = 'number X RepNum
  (define (tag x) (attach-tag 'number x))
  (put 'make 'number tag)
  (put 'add '(number number)
    (lambda (x y) (tag (+ x y))))
  (put 'sub '(number number)
    (lambda (x y) (tag (- x y))))
  (put 'mul '(number number)
    (lambda (x y) (tag (* x y))))
  (put 'div '(number number)
    (lambda (x y) (tag (/ x y))))
  'done)

;; External constructor for ordinary numbers:
;; Sch-Num --> Number
(define (create-number x)
  ((get 'make 'number) x))
```

Rational Number Package

```
;;; the rational number package
(define (install-rational-package)
  ;; Internal rep: RepRat = Sch-Num X Sch-Num
  ;; internal procedures on RepRat
  (define (make-rat n d) (cons n d))
  (define (numer x) (car x))
  (define (denom x) (cdr x))
  (define (add-rat x y)
    (make-rat (+   (*   (numer x) (denom y))
                   (*   (denom x) (numer y)))
              (*   (denom x) (denom y))))
  (define (sub-rat x y)
    (make-rat (-   (*   (numer x) (denom y))
                   (*   (denom x) (numer y)))
              (/   (denom x) (denom y))))
  (define (mul-rat x y)
    (make-rat (*   (numer x) (numer y))
              (*   (denom x) (denom y))))
  (define (div-rat x y)
    (make-rat (*   (numer x) (denom y))
              (*   (denom x) (numer y)))))
```

Rational Package, cont'd

```
  ;; External rep: Rational = 'rational X RepRat
  (define (tag x) (attach-tag 'rational x))
  (put 'make 'rational
    (lambda (n d) (tag (make-rat n d))))
  (put 'add '(rational rational)
    (lambda (x y) (tag (add-rat x y))))
  (put 'sub '(rational rational)
    (lambda (x y) (tag (sub-rat x y))))
  (put 'mul '(rational rational)
    (lambda (x y) (tag (mul-rat x y))))
  (put 'div '(rational rational)
    (lambda (x y) (tag (div-rat x y))))
  'done)

;; External constructor interface
(define  (create-rational n d)
  ((get 'make 'rational) n d))
```

Problem: Rational with Complex

$$\frac{3}{(4+5i)} + \frac{1}{(2+3i)}$$

Approach: Generic Number

```
;; Generic Numbers:
;; Generic-Num = Rational U Complex U Number
```

Allow the numerator and denominator in our rational package to be Generic-Nums, not just Sch-Nums!

Rational Package - "Genericized"

```
;;; the rational number package
(define (install-rational-package)
  ;; Internal rep: RepRat = Generic-Num X Generic-Num
  ;; internal procedures on RepRat
  (define (make-rat n d) (cons n d))
  (define (numer x) (car x))
  (define (denom x) (cdr x))
  (define (add-rat x y)
    (make-rat (add (mul (numer x) (denom y))
                   (mul (denom x) (numer y)))
              (mul (denom x) (denom y))))
  (define (sub-rat x y)
    (make-rat (sub (mul (numer x) (denom y))
                   (mul (denom x) (numer y)))
              (mul (denom x) (denom y))))
  (define (mul-rat x y)
    (make-rat (mul (numer x) (numer y))
              (mul (denom x) (denom y))))
  (define (div-rat x y)
    (make-rat (mul (numer x) (denom y))
              (mul (denom x) (numer y))))

  ;; Interface to rest of system
  ...
  'done)
```

Rational/Complex Example

$$\frac{3}{(4+5i)} + \frac{1}{(2+3i)}$$

```
(define z1 (create-rational
              (create-number 3)
              (make-from-real-imag (create-number 4)
                                   (create-number 5)))
(define z2 (create-rational
              (create-number 1)
              (make-from-real-imag (create-number 2)
                                   (create-number 3)))

(add z1 z2)
==> (rational (number 4)
              (complex (rectangular (number 6)
                                    (number 8))))
```

Problem: Mixed Types

An easy example
:

$3 \times \frac{1}{2}$

No element in the table!

Approach: Mixed-Type Procedures

```
;; In the rational package...
;; mul-num-rat: RepNum, RepRat -> Rational
(define (mul-num-rat n r)
  (tag (mul-rat (make-rat n (create-number 1))
                r)))
(put 'mul '(number rational) mul-num-rat)
```

Coercion

```
(define (number->rational x)
  (create-rational x (create-number 1)))
```

Coercion Table

```
;; (put-coercion <from-type> <to-type> <procedure>)
(put-coercion 'number 'rational number->rational)

(define (apply-generic op . args)
 (let ((type-tags (map type-tag args)))
  (let ((proc (get op type-tags)))
    (if proc
        (apply proc (map contents args))
        (if (= (length args) 2)
            (let ((t1 (car type-tags))
                  (t2 (cadr type-tags))
                  (arg1 (car args))
                  (arg2 (cadr args)))
              (let ((t1->t2 (get-coercion t1 t2))
                    (t2->t1 (get-coercion t2 t1)))
                (cond (t1->t2
                       (apply-generic op
                                      (t1->t2 a1)
                                      a2))
                      (t2->t1
                       (apply-generic op
                                      a1
                                      (t2->t1 a2)))
                      (else (error "No method")))))
            (error "No method")))))
```

Polynomials

$2x^5 + 7x + 3$ to which we want to add $3x$

```
;; Term = <order> X <coefficient>
;;      = Pos-Integer X Generic-Num
;;
;; make-term: Pos-Integer, GenericNum -> Term
;; order: Term -> Pos-Integer
;; coeff: Term -> Generic-Num

;; TermList = empty-termlist U (Term X Termlist)
;;
;; the-empty-termlist: () -> empty-termlist
;; empty-termlist?:  TermList -> Bool
;; adjoin-term:  Term, TermList -> TermList
;; first-term: TermList -> Term
;; rest-terms: TermList -> TermList
```

Polynomial Example

$2x^5 + 7x + 3$ becomes

```
(define p1
  (make-polynomial
    'x
    (adjoin-term
      (make-term 5 2)
      (adjoin-term
        (make-term 7 1)
        (adjoin-term
          (make-term 3 0)
          (the-empty-termlist))))))
p1
==> (polynomial x (5 2) (7 1) (3 0))
```

Polynomial Package

```
(define (install-polynomial-package)
  ;; Internal Rep:  RepPoly = ???
  ;; internal procedures
  (define (make-poly variable term-list) ...)
  (define (add-poly p1 p2) ...)
  (define (mul-poly p1 p2) ...)

  ;; representations used internally
  ;;   for terms and term-lists
  ...

  ;; External Rep: Polynomial = 'polynomial X RepPoly
  (define (tag x) (attach-tag 'polynomial x))
  (put 'add '(polynomial polynomial)
    (lambda (p1 p2) (tag (add-poly p1 p2))))
  (put 'mul '(polynomial polynomial)
    (lambda (p1 p2) (tag (mul-poly p1 p2))))
  (put 'make 'polynomial
    (lambda (var terms) (tag (make-poly var terms))))
  'done)
```

Addition of Polynomials

```
;; add-poly: RepPoly, RepPoly -> RepPoly
 (define (add-poly p1 p2)
   (if (same-variable? (variable p1) (variable p2))
       (make-poly (variable p1)
                  (add-termlists (term-list p1)
                                 (term-list p2)))
       (error "Polys not in same var -- ADD-POLY"
              (list p1 p2))))
```

Addition of TermLists

```
;;; addition of termlists
(define (add-termlists L1 L2)
  (cond ((empty-termlist? L1) L2)
        ((empty-termlist? L2) L1)
        (else
         (let ((t1 (first-term L1))
               (t2 (first-term L2)))
           (cond ((> (order t1) (order t2))
                  (adjoin-term t1
                               (add-termlists
                                 (rest-terms L1)
                                 L2)))
                 ((< (order t1) (order t2))
                  (adjoin-term t2
                               (add-termlists
                                  L1
                                  (rest-terms L2))))
                 (else
                  (adjoin-term
                   (make-term
                     (order t1)
                     (add (coeff t1) (coeff t2)))
                   (add-termlists
                     (rest-terms L1)
                    (rest-terms L2)))))))))
```

Message Passing

```
(define (make-from-real-imag x y)
  (define (dispatch op)
     (cond ((eq? op 'real-part) x)
           ((eq? op 'imag-part) y)
           ((eq? op 'angle) (atan y x))
           ...
           (else (error "unknown op" op))))
  dispatch)
```

Example:

```
(define z1 (make-from-real-imag 3 4))

(z1 'real-part) -> 3
```